



KVT  
KAI




Edge Color: Purple  
Friction Rating: FF

Compound: Asbestos Free Organic  
GAWR: 27,750

Application Reference





**Friction Material Test Report**  
**Friction Level**  
(Chase - SAE J 661 A)

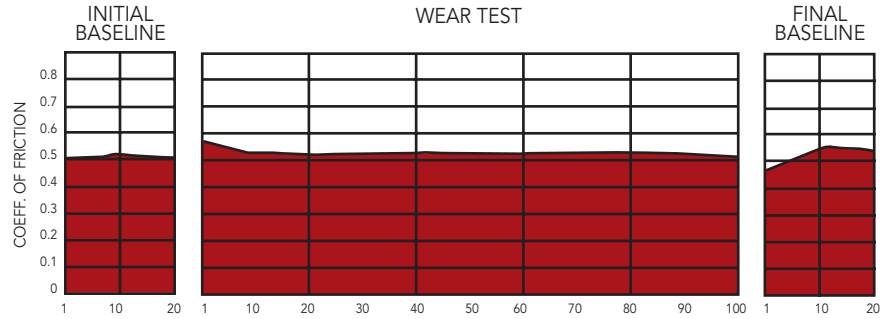

KVT is an asbestos-free aramid fiber enhanced friction material specifically developed for transit bus and motor coach industries. KVT exhibits exceptional mileage over other competitive products. In high heat applications, especially in low-floor vehicles, KVT offers stable friction, excellent drum compatibility and the lowest cost per mile value.

**Brake Dynamometer Test**  
**Procedure: FMVSS - 121**

Brake Size: 16.5 x 8.875  
Brake Type: ArvinMeritor  
GAWR (lbs.): 27,750  
Rolling Radius (in.): 20.7  
Leading Lining: KVT FF  
Trailing Lining: KVT FF  
Air Chamber: Type 30  
Slack Adjuster: 6.5 in.

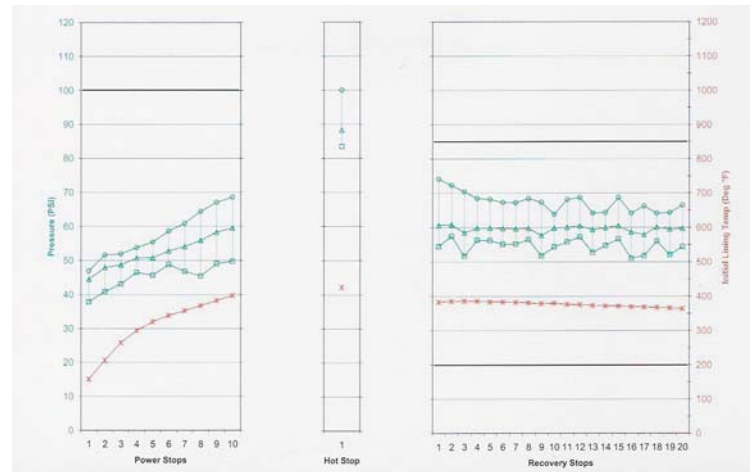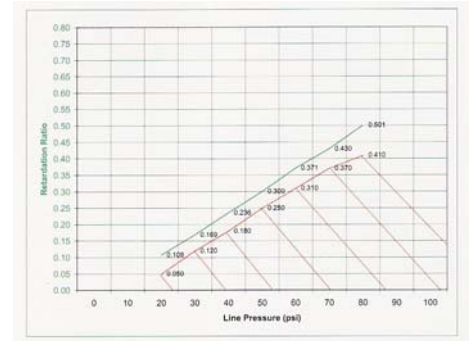

SECOND FADE  
KVT

SECOND RECOVERY  
KVT

